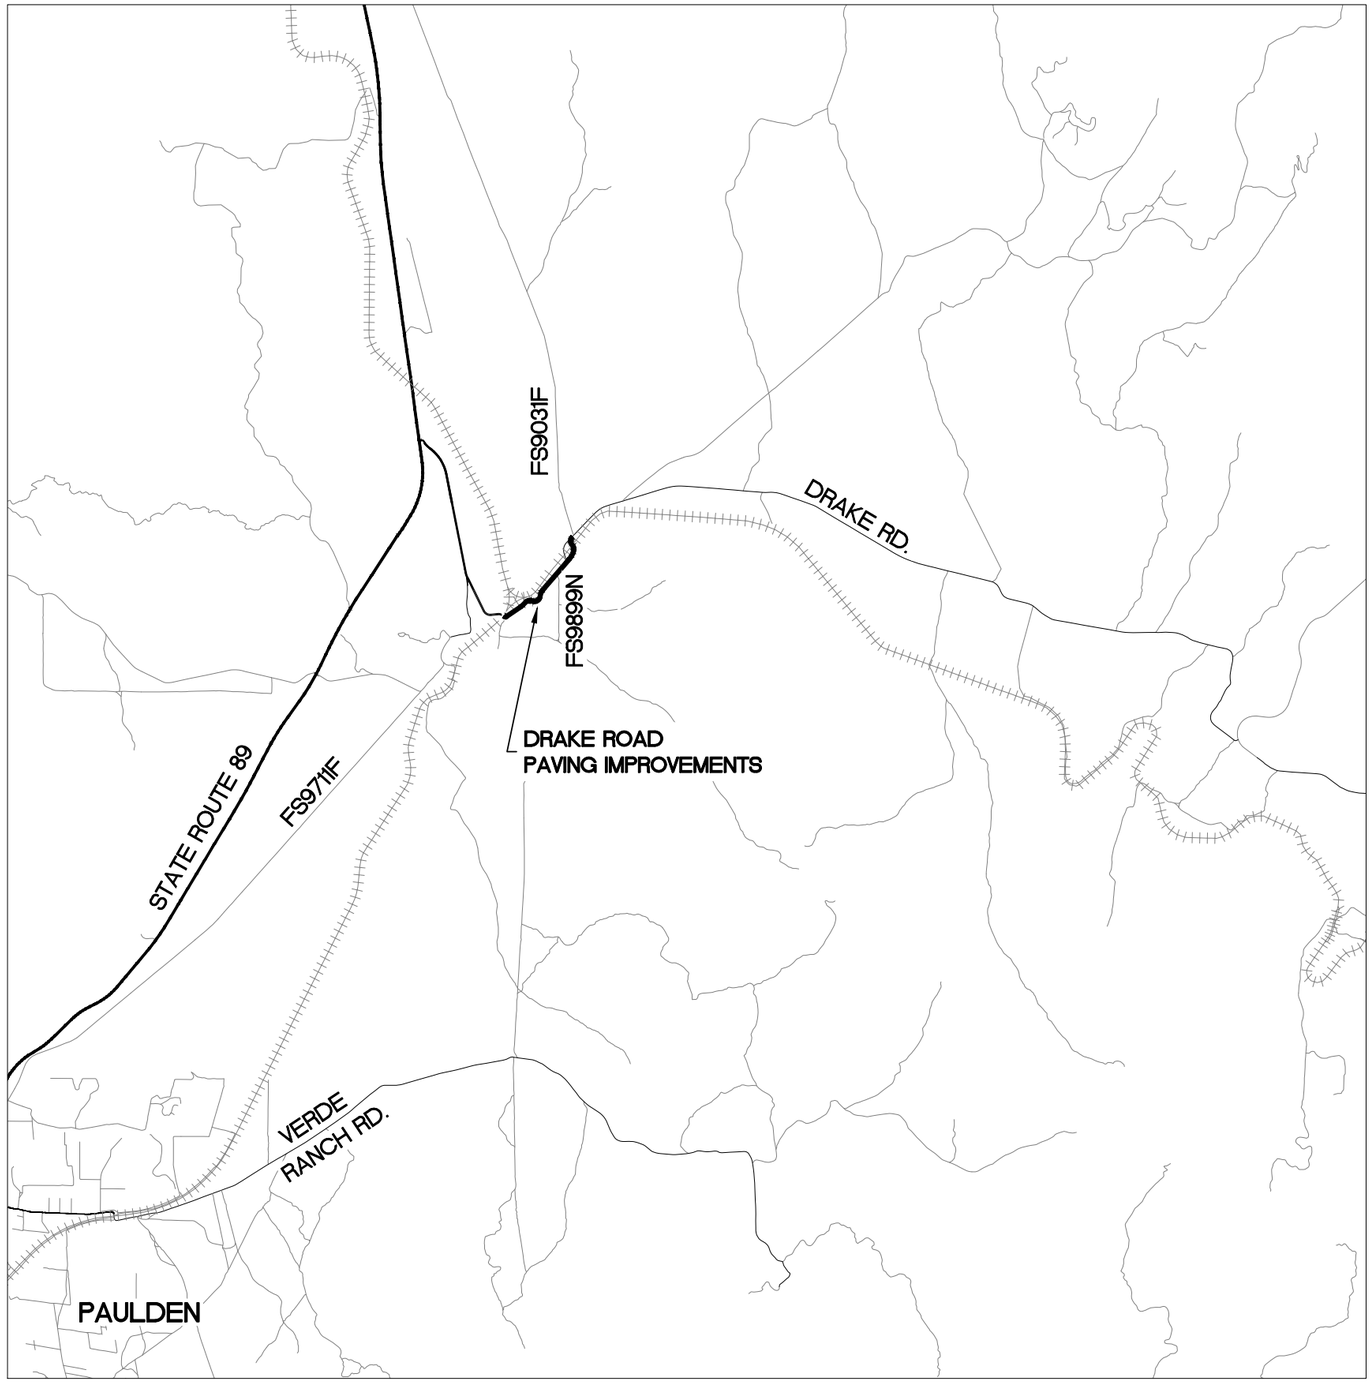

DRAKE CEMENT ROAD
GENERAL NOTES

1) DESIGN SPEED = 30 MPH
2) LENGTH OF PROJECT = 5,250 LF

Item No.	Description	Quantity	Unit
1	Clearing and Grubbing	1	LS
2	Asphaltic Concrete Pavement, 3/4" High Traffic, PG 64-22	3,761	TN
3	Subgrade Preparation	13,963	SY
4	Unsuitable Material Mitigation, Single Layer of Geotextile, SP MAG 205	100	CY
5	Unsuitable Material Mitigation, Double Layer of Geotextile, SP MAG 205	100	CY
6	Aggregate Base Course	4,665	CY
7	Roadway Excavation - Cut to Fill	5,328	CY
8	Roadway Excavation - Export	2,208	CY
9	Bituminous Tack Coat (0.10 GAL/SY)	878	GAL
10	Striping, Yellow (4" Equivalent)	20,700	LF
11	Thermoplastic Pavement Markings - White (4" Equivalent)	288	LF
12	Thermoplastic Railroad Crossing Pavement Markings	4	EA
13	18" CMP	55	LF
14	Riprap (D50=4")	1	CY
15	CMP End Section Per ADOT STD. DTL. C-13.25	2	EA
16	Seeding	3,685	SY
17	SWPPP	1	LS
18	Quality Control and Testing	1	LS
19	Mobilization	1	LS
20	Construction Survey and Layout	1	LS
21	Traffic Control	1	LS
22	Force Account	1	LS

CUT:	7,536 CY
FILL:	5,328 CY
EXPORT	2,208 CY

Call at least two full working days before you begin excavation.
ARIZONA 811
Arizona Blue Stake, Inc.
Dial 8-1-1 or 1-800-STAKE-IT (782-5348)
In Maricopa County: (602) 263-1100

DRAKE CEMENT ROAD
UTILITY COMPANY NOTES

THE FOLLOWING LISTING OF COMPANIES REPRESENT UTILITIES THAT MAY EXIST IN THE AREA. UTILITIES ARE NOT SHOWN ON THESE PLANS AND IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EXISTENCE OF UTILITIES IN THE AREA AND NOTIFY BLUE STAKE AT LEAST 48 HOURS PRIOR TO INITIATING ANY CONSTRUCTION AT THE SITE.

ELECTRIC
APS – PRESCOTT
ELM LOCATORS/RECALLS AND UNKNOWNS
623–780–3350
602–371–7171 (EMERGENCY)

BNSF
KATE KALINOSKY
MANAGER PUBLIC PROJECTS
909–386–4474

COAXIAL, FIBER
CENTURYLINK
DISPATCH
800–778–9140

GAS
KINDER MORGAN
CHRIS STEWART
CHRISTOPHERM_STEWART@KINDERMORGAN.COM
928–522–2004

GAS
ENERGY TRANSFER
CALLAN PICARD
928–310–8573

Registered Professional Engineer (Civil)
CERTIFICATE NO. 67794
JUNYI SHAN
Date Signed 05-18-2021
ARIZONA, U.S.A.

YAVAPAI COUNTY
PUBLIC WORKS DEPARTMENT
1100 COMMERCE DR. PRESCOTT, ARIZONA 86305
(928) 771–3183
DAN CHERRY, P.E., CFM – PUBLIC WORKS DIRECTOR

PROJECT NAME: DRAKE ROAD PAVING IMPROVEMENTS	PROJECT NUMBER: 21–22761
	DESIGN BY: DJC
	DRAWN BY: DJC
	CHECKED BY: JS
SHEET NAME: VICINITY MAP AND QUANTITIES	DATE: 5/19/2021
	SHEET: 3 OF 32

PLOTTED: May 19, 2021–10:49am