


QUAIL TRAIL VICINITY MAP

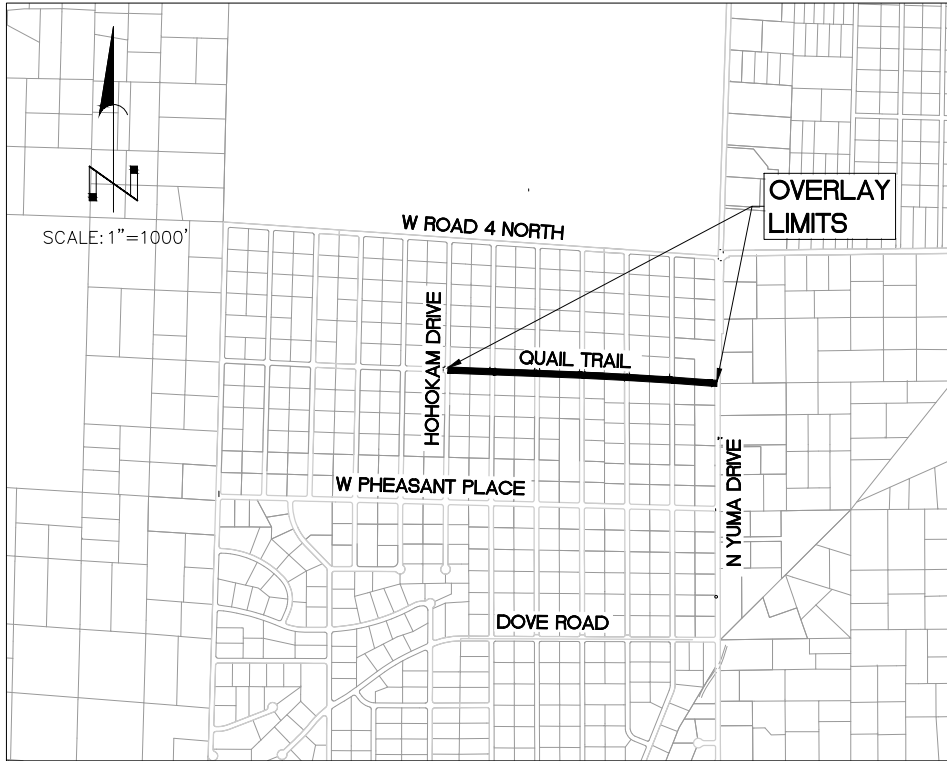

QUAIL TRAIL EST QUANTITIES

ITEM NO.	DESCRIPTION	QUANTITY	UNIT
1	2" OVERLAY ASPHALTIC CONCRETE PAVEMENT, 1/2" HIGH TRAFFIC, PG 64-22	917	TN
2	SHOULDERING MATERIAL	155	TN
3	SHOULDER BUILD-UP AND GRADING	4,540	LF
4	BITUMINOUS TACK COAT (0.10 GAL/SY)	819	GAL
5	PAVEMENT MATCH TYPE "ML1"	2	EA
6	PAVEMENT MATCH TYPE "ML2"	11	EA
7	PAVEMENT MATCH TYPE "C-1"	2	EA
8	PAVEMENT MATCH TYPE "G-1"	19	EA
9	THICKENED EDGE PAVEMENT PREP	24	LF

QUAIL TRAIL GENERAL NOTES

- 1) REGULATORY (POSTED) SPEED LIMIT = 25 MPH
- 2) AVERAGE DAILY TRAFFIC (ADT) = 380
- 3) LENGTH OF PROJECT = 2,793 LF

QUAIL TRAIL
UTILITY COMPANY NOTES


THE FOLLOWING LISTING OF COMPANIES REPRESENT UTILITIES THAT MAY EXIST IN THE AREA. UTILITIES ARE NOT SHOWN ON THESE PLANS AND IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EXISTENCE OF UTILITIES IN THE AREA AND NOTIFY BLUE STAKE AT LEAST 48 HOURS PRIOR TO INITIATING ANY CONSTRUCTION AT THE SITE.

ELECTRIC
APS – PRESCOTT
APS LOCATE DEPT
602-493-4225
602-371-7171 (EMERGENCY)

COAXIAL, FIBER
CTLQL-CENTURYLINK
USIC DISPATCH CENTER
800-778-9140

CABLE TV
SPARKLIGHT
USIC DISPATCH CENTER
800-778-9140

ROAD 5 NORTH VICINITY MAP

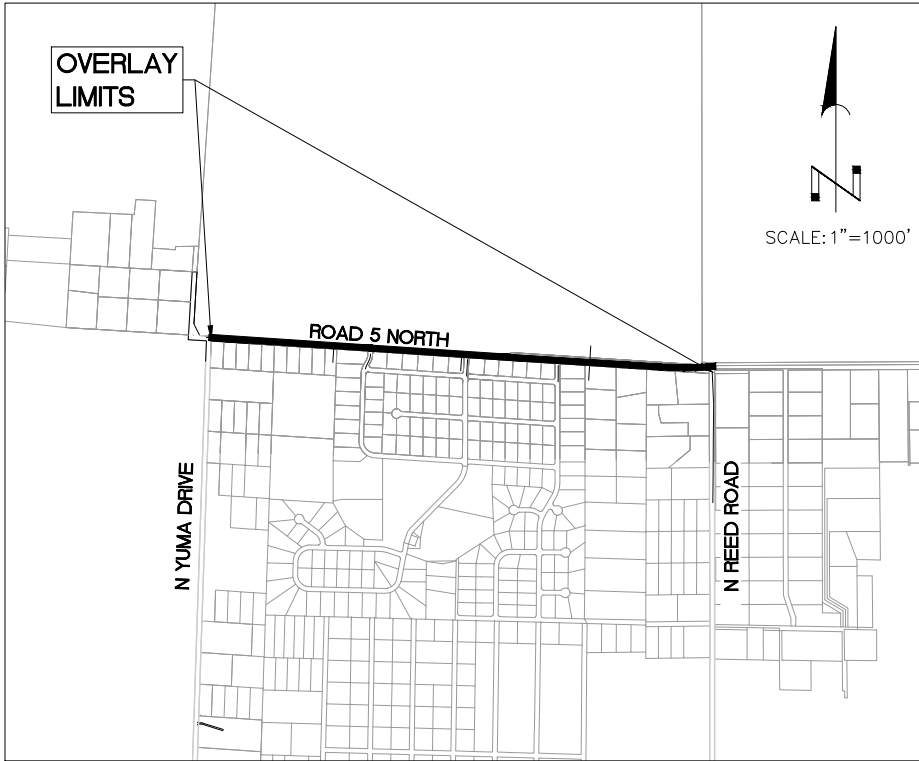

ROAD 5 NORTH EST QUANTITIES

ITEM NO.	DESCRIPTION	QUANTITY	UNIT
1	2" OVERLAY ASPHALTIC CONCRETE PAVEMENT, 1/2" HIGH TRAFFIC, PG 64-22	1,534	TN
2	SHOULDERING MATERIAL	325	TN
3	SHOULDER BUILD-UP AND GRADING	9,485	LF
4	BITUMINOUS TACK COAT (0.10 GAL/SY)	1,345	GAL
5	PAVEMENT MATCH TYPE "ML1"	5	EA
6	PAVEMENT MATCH TYPE "C-1"	2	EA
7	PAVEMENT MATCH TYPE "C-2"	2	EA
8	PAVEMENT MATCH TYPE "G-1"	20	EA
9	STRIPING, YELLOW SOLID (4" EQUIV.)	21,868	LF

ROAD 5 NORTH GENERAL NOTES

- 1) REGULATORY (POSTED) SPEED LIMIT = 25 MPH
- 2) AVERAGE DAILY TRAFFIC (ADT) = 912
- 3) LENGTH OF PROJECT = 5,122 LF

ROAD 5 NORTH
UTILITY COMPANY NOTES

THE FOLLOWING LISTING OF COMPANIES REPRESENT UTILITIES THAT MAY EXIST IN THE AREA. UTILITIES ARE NOT SHOWN ON THESE PLANS AND IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EXISTENCE OF UTILITIES IN THE AREA AND NOTIFY BLUE STAKE AT LEAST 48 HOURS PRIOR TO INITIATING ANY CONSTRUCTION AT THE SITE.

ELECTRIC
APS – PRESCOTT
APS LOCATE DEPT
602-493-4225


WATER
QUAIL RIDGE DWD
MIKE O'BOYLE
989-529-5013

GAS
UNISOURCE ENERGY
DEVON LOBSTEIN
520-437-3267

COAXIAL, FIBER
CTLQL-CENTURYLINK
USIC DISPATCH CENTER
800-778-9140

CABLE TV
SPARKLIGHT
USIC DISPATCH CENTER
800-778-9140

GOVERNMENT CANYON VICINITY MAP

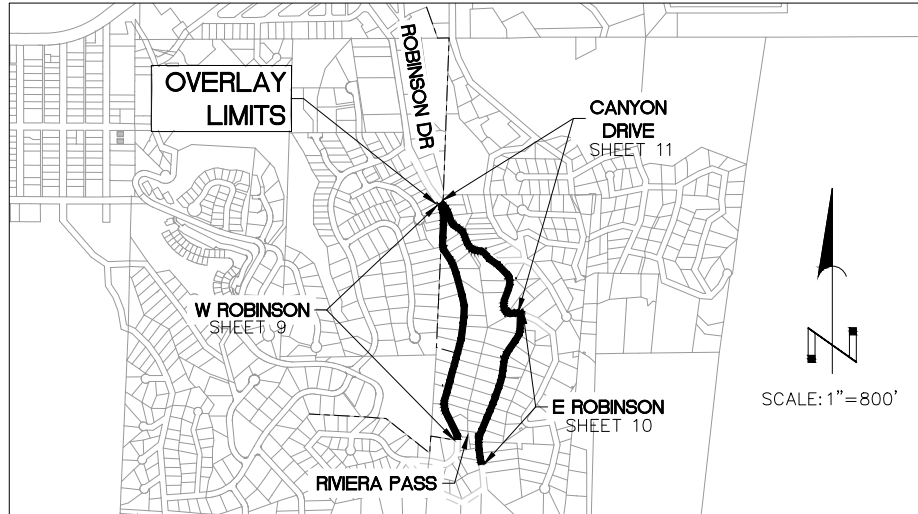

ROBINSON DRIVE EST QUANTITIES

ITEM NO.	DESCRIPTION	QUANTITY	UNIT
1	2" OVERLAY ASPHALTIC CONCRETE PAVEMENT, 1/2" HIGH TRAFFIC, PG 64-22	1,033	TN
2	SHOULDERING MATERIAL	140	TN
3	SHOULDER BUILD-UP AND GRADING	4,000	LF
4	BITUMINOUS TACK COAT (0.10 GAL/SY)	799	GAL
5	PAVEMENT MATCH TYPE "ML1"	4	EA
6	PAVEMENT MATCH TYPE "C-1"	21	EA
7	PAVEMENT MATCH TYPE "G-1"	16	EA
8	WATER VALVE FRAME ADJUSTMENT (Quad City STD DTL 391Q)	3	EA
9	MANHOLE FRAME ADJUSTMENT (Quad City STD DTL 422Q)	1	EA
10	BITUMINOUS PAVEMENT REMOVAL BY MILLING AND DISPOSAL, 2" MILL	734	SY
11	BITUMINOUS PAVEMENT REMOVAL BY MILLING AND DISPOSAL, TAPER MILL 0-2"	209	SY
12	THICKENED EDGE PAVEMENT PREP	1,365	LF
13	AC EMBANKMENT CURB	1,240	LF

CANYON DRIVE EST QUANTITIES

ITEM NO.	DESCRIPTION	QUANTITY	UNIT
1	2" OVERLAY ASPHALTIC CONCRETE PAVEMENT, 1/2" HIGH TRAFFIC, PG 64-22	282	TN
2	SHOULDERING MATERIAL	50	TN
3	SHOULDER BUILD-UP AND GRADING	1,500	LF
4	BITUMINOUS TACK COAT (0.10 GAL/SY)	204	GAL
5	PAVEMENT MATCH TYPE "ML1"	2	EA
6	PAVEMENT MATCH TYPE "C-1"	1	EA
7	PAVEMENT MATCH TYPE "G-1"	3	EA
8	AC EMBANKMENT CURB	500	LF
9	THICKENED EDGE PAVEMENT PREP	500	LF
10	REMOVE AND REPLACE PAVEMENT SECTION	116	SY
11	WATER VALVE FRAME ADJUSTMENT (Quad City STD DTL 391Q)	1	EA

ROBINSON DRIVE GENERAL NOTES

- 1) REGULATORY (POSTED) SPEED LIMIT = 25 MPH
- 2) AVERAGE DAILY TRAFFIC (ADT) = 302
- 3) LENGTH OF PROJECT = 3,425 LF

ROBINSON DRIVE
UTILITY COMPANY NOTES

THE FOLLOWING LISTING OF COMPANIES REPRESENT UTILITIES THAT MAY EXIST IN THE AREA. UTILITIES ARE NOT SHOWN ON THESE PLANS AND IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EXISTENCE OF UTILITIES IN THE AREA AND NOTIFY BLUE STAKE AT LEAST 48 HOURS PRIOR TO INITIATING ANY CONSTRUCTION AT THE SITE.


ELECTRIC
APS – PRESCOTT
APS LOCATE DEPT
602-493-4225

WATER
CITY OF PRESCOTT
EDWARD FENLON
928-777-1616

GAS
UNISOURCE ENERGY
DEVON LOBSTEIN
520-437-3267

COAXIAL, FIBER
CTLQL-CENTURYLINK
USIC DISPATCH CENTER
800-778-9140

CABLE TV
SPARKLIGHT
USIC DISPATCH CENTER
800-778-9140

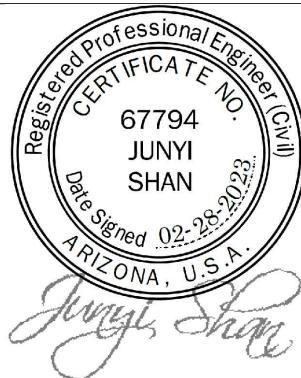

YAVAPAI COUNTY
PUBLIC WORKS DEPARTMENT

1100 COMMERCE DR. PRESCOTT, ARIZONA 86305
(928) 771-3183
DAN CHERRY, P.E., CFM – PUBLIC WORKS DIRECTOR

PROJECT NAME:	OVERLAY (SPRING, FY 2022-2023)
SHEET NAME:	VICINITY MAP AND QUANTITIES
PROJECT NUMBER:	22-23265
DESIGN BY:	DJC
DRAWN BY:	DJC
CHECKED BY:	JS
DATE:	2/28/2023
SHEET:	3 OF 11